



For more than 50 years, LaVanture Products has listened to the needs of our customers. We have invested in our future to help build yours. From hands on product design to on-hand inventory, LaVanture strives to offer the most advanced technologies to the industry. We have hundreds of adhesive and sealant options that are used in RV, Marine, Utility Trailer, and Speciality Product markets.

LaVanture has hand selected leading manufacturers to build and produce quality products with on-time delivery you have been accustomed to as a partner of LaVanture Products.

Whether your application requires an adhesive or sealant, LaVanture offers both in 'gun-grade' or tape form. Our technologies range from Latex to high bond tapes.

Contact your Account Manager today or e-mail us at: sales@lavanture.com

THE LAVANTURE ADVANTAGE...

Since 1969 LaVanture Products Company has been providing the best total package of products and services to our customers. We invest in our future so we can continue to meet market demands and customer needs. When you select LaVanture Products, you provide your business with the LaVanture advantage:

- Quick & Personal Response
- Quality Products
- Continuous Innovation
- Competitive Pricing
- Courteous Service
- On time Delivery

This Trims, Seals and Foam Tape catalog features innovation, and high quality products to meet the challenging applications of today's markets.

Our Goal is Simple:

• Distribute high quality products that meet customer needs at a fair price with on-time delivery.

Visit www.lavanture.com for information on all our quality products.



TABLE OF CONTENTS

TABLE OF CONTEINIS
Automotive SealsPage 3-4
Hollow D Bulbs, Hollow P Bulbs, Rectangle Seals
Foam Cap TapePage 5-6
Series 6100 Foam Cap Tapes
Light Density Vinyl Foam TapePage 7
Series 7100 and 8100 General Purpose Foam Tape
Medium Density Vinyl Foam TapePage 8
Series 1100 and 1500 General Purpose Foam Tape
Vinyl Glazing TapePage 9
Series 1520 Double Face Vinyl Glazing Tape
Heavy Density Vinyl Foam TapePage 9
Series 2500 General Purpose Foam Tape
Press-On BumpersPage 10
Series B2350 Protective Bumpers/Separators
Press-On Foam TapesPage 10
Series TPE Polyether, Polyethylene, PVC, Acrylic, Neoprene Foam Tapes
Butyl Sealants and TapesPage 11
TremPro 651 Series Sealant and TNG, LBT series Butyl Tapes
Polyshim II TapePage 12
TremPro Series S17D Special Use Glazing Tape
Polyolefin Glazing TapesPage 12
TEI Series Polyolefin Foam Glazing Tapes
Die CutsPage 12
Custom Foam Die Cuts
Hi-Bond TapesPage 13
Gaska GHB and HB Series and 3M Hi-Bond Tapes
EPDM Specialty SealsPage 14-15
Automotive Special application Weather Seals
Standard Trim and Bulb TrimPage 16-17
TS Series Standard Trim and TSB Series Trim with Bulb Seal
Polyurethane SealantsPage 18-19
TremPro V Series High Performance Polyurethane Sealants
Silicone and Acrylic SealantsPage 20-21
TremPro and TemPro T Series Silicone and Acrylic Special Sealants
BASF High Performance SealantsPage 22-23
DegaBond, DegaCoat and DegaSeal Series Sealants
LaVanture Silicone SealantsPage 24
Series LS100 and LS150
LaVanture Acrylic Latex and Expanding FoamPage 25
Series LS25 and LS500
LaVanture Speciality SealantsPage 26
Series LS200, LS250, and LS225
Liquid NailsPage 26
Subfloor, construction and bathroom adhesives
EternaBond Adhesives and SealantsPage 27
Roof Seal and RV Seal Tape, Dolphin Seal, and AlumiBond Tapes
Advanced AhesivesPage 28
Series AAT272, AAT322 and AATMB188
Sealants SpecificationsPage 29-30
Specifications for all Sealants Products
Assorted ProductsPage 31-34
Hardware, Electrical, Gas Spring and Special Products





All of these products meet our quality standards and have passed a rigid testing program. If we sell it ...we stand behind it!





Hollow D, Hollow P, Ribbed Rectangle and Speciality Seals

Stock No. Size LP1085 .354" W x .205" H LP1153W .375" W x .250" H LP105 .375" W x .438" H	Color Black	Adhesive	
LP1153W .375" W x .250" H	Black		Ctn. Qty
		PSA	1000'
10105 2758.34 4208.11	White	PSA	1000'
LP105 .375" W x .438" H	Black	PSA	500'
LP108 .500" W x .360" H	Black	PSA	500'
LP108W .500" W x .360" H	White	PSA	500'
LP101 .500" W x .500" H	Black	PSA	500'
LP202 .500" W x .500" H	Black	PSA	450'
LP5036-H .500 W x .696" H	Black	HATS	500'
LP5036-PSA .500" W x .696" H	Black	PSA	500'
LP5080-H .500" W x .800" H	Black	HATS	500'
LP109 .610" W x .360" H	Black	PSA	500'
LP2601-PSA .640" W x .500" H	Black	PSA	500'
LP119 .750" W x .375" H	Black	PSA	250'
LP119-500 .750" W x .375" H	Black	PSA	500'
LP135 .750" W x .562" H	Black	PSA	250'
n LP135-H .750" W x .562" H	Black	HATS	250'
all LP135W-H .750" W x .562" H	White	HATS	250'
LP135-FT .750" W x .562" H	Black	FILAMENT	500'
LP1705 .625" W x .400"H	Black Black	PSA	500'
LP1750 .825" W x .760" H		PSA	150'
LP 1750-H .825" W × .760" H LP691 .875" W × 1.00" H	Black Black	HATS PSA	400' 250'
LP691-H .875" W x 1.00" H	Black	HATS	250'
LP691W-H .875" W x 1.00" H	White	HATS	250'
LP402 1.50" W x .500" H	Black	PSA	250'
Hollow P Bulb Seals	Didek	134	250
me Stock No. Size	Color	Adhesive	Ctn. Qty
LP589 1.250" W x .848" H	Black	PSA	200'
LP589-H 1.250" W x .848" H	Black	HATS	250'
LP589NA 1.250" W x .848" H	Black	NONE	250'
or LP2452-H 2.625" W X .875" H	Black	HATS	100'
Rectangle Seals			
Stock No. Size	Color	Adhesive	Ctn. Qty
LP113 .375" W x 188" H	Black	PSA	1000'
LP2897 .500" W x .300" H	Black	PSA	500'
LP376 .589" W x .123" H	Black	PSA	1000'
LP103 .625" W x .375" H	Black	PSA	400'
Speciality Seals			
Stock No. Size	Color	Adhesive	Ctn. Qty
SP0445 1" W	Black	PSA	200'
LP2028 .905" W x .290" H	Black	NONE	500'
LP214-H .950" W x .710" H	Black	HATS	500'
2 Up Seals			
Stock No. Size	Color	Adhesive	Ctn. Qty
	Black	PSA	1000'
LP113-2UP .375" W x .188" H		PSA	400'
LP113-2UP .375" W x .188" H LP103-2UP .625" W x .375" H	Black		
	Black Black	PSA	500'
LP103-2UP .625" W x .375" H		PSA PSA	500' 250'
LP103-2UP .625" W x .375" H LP119-2UP .750" W x .375" H	Black		
LP103-2UP .625" W x .375" H LP119-2UP .750" W x .375" H LP135-2UP .750" W x .562" H	Black Black	PSA	250'

NEW 2-UP SEALS

This new product saves on two steps: measure once for two seals, then just tear apart and apply. Call for pricing and availability.

SPECIFICATIONS

Most LaVanture EPDM rubber seals are medium density, 45-50 durometer. Standard Rubber Manufacturers Association (RMA)tolerances apply to all the EPDM rubber seals.

ADHESIVES FOR EPDM

PSA : Pressure Sensitive Adhesive tape.

HATS: Orange or Red liner represents 'Heat Activated Tape' for adhesive with extreme holding power.'

FILAMENTS: PSA with embedded fiberglass fibers for greater stability.


APPLICATIONS

- Ramp Doors
- Slide Outs
- Door Hatches
- Live Wells
- Concession Doors

SPECIALITY SEALS

Custom designed profiles and colors are also available to meet special applications. Please call for information.

AUTOMOTIVE SEALS

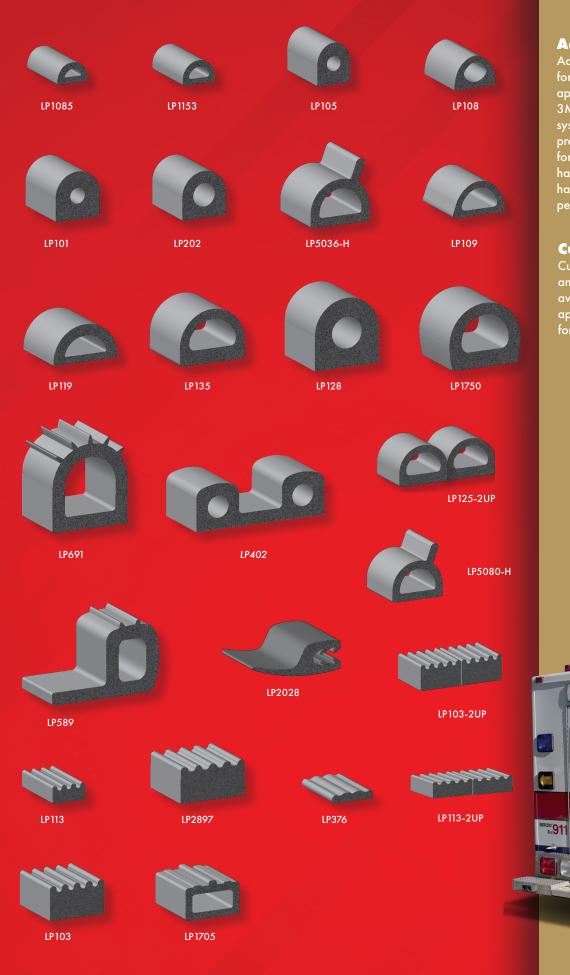

Adhesives:

Adhesives are available for a wide variety of applications in two formats: 3M[™]s heat activated tape system, (HATS) and a pressure sensitive (PSA) format. Both systems have been tested and have passed our rigid performance requirements.

Custom Seals

Custom designed profiles and colors are also available to meet special applications. Please call for information.

AUTOMOTIVE SEALS

PA

www.lavanture.com | 800.348.7625 | sales@lavanture.com

PAGE 4

AMBU LANCE

32

1 00

*

Light Density Foam Cap Tape®

Cap Tape® was developed initially to provide an economical seal between pickup truck caps and body side rails. Today, Cap Tape® is used effectively for a variety of noncritical industrial and commercial sealing applications. The tape flexes to fill-in and seal irregular surfaces and conditions against vibration and rattles. TP Series is cast-on 83# white paper and TM Series is cast-on 1.5 polyester film.

Typical Industry

Applications Include:

- Truck Caps
- Recreational Vehicle
- Automotive Aftermarket
- Weather Stripping

Physical Properties* Density and Hardness: Compression Deflection: Compression Set: Tensile Strength:

Elongation Percent:

Thermal Conductivity:

Service Temperature:

Application Temperature:

6 lbs./cu.ft./20 (shore 00) 1.8 psi @ 25% 7 @ 25% 22 psi 140 0.26 (k factor) -40 to 180 50 to 110

* Information shown as a guide only and should not be used as specification data.

Cast-on 83# White Paper						
Stock No.	Thickness x Width	Length	Color	Carton		
ТР750В	.188" x .750"	30'	Black	40 Rolls		
TP100B	.188" x 1.00"	30'	Black	32 Rolls		
TP125B	.188" x 1.25"	30'	Black	24 Rolls		
TP150B	.188" x 1.50"	30'	Black	20 Rolls		
TP200B	.188" x 2.00"	30'	Black	16 Rolls		
TP250B	.188" x 2.50"	30'	Black	12 Rolls		
Cast-on 1.5 mil Po	lyester Film					
TM100B	.188" x 1.00"	30'	Black/PE Film	32 Rolls		
TM125B	.188" x 1.25"	30'	Black/PE Film	24 Rolls		
TM150B	.188" x 1.50"	30'	Black/PE Film	20 Rolls		
TM200B	.188" x 2.00"	30'	Black/PE Film	16 Rolls		
TM250B	.188" x 2.50"	30'	Black/PE Film	12 Rolls		
TMV615042812	.250" x 1.875"	12.5'	Black/PE Film	16 Rolls		
TMV6150428	.250" x 2.50"	16'	Black/PE Filmr	15 Rolls		
TMV61504283	.250" x 2.50"	3.33'	Black/PE Filmr	72 Rolls		
TMV6150608V	.375" x .500"	30'	Black/PE Film	48 Rolls		

DIE CUTS for your application available for quotes.



TPV7100 Light Density Vinyl Foam Tape

Series TPV7100 general purpose foam tapes are light density closed-cell Polyvinyl Chloride product, cast-on 7 mil clay coated paper, manufactured for use as a positive seal for irregular surfaces and/or for creating a tight seal on radius curve applications. This light density foam compresses easily and offers comformability, strength and resilience. It also offers excellent resistance to oxidation, weather and fungi.

Typical Industry Applications Include:

- Automotive Construction Recreational Vehicle
- Consumer Electronics Heating Air Conditioning



Density and Hardness: Compression Deflection: Compression Set: Tensile Strength: Elongation Percent: Thermal Conductivity: Service Temperature: Application Temperature: 7 lbs./cu.ft./14 (shore 00) .8 psi @ 25% 4 @ 25% 25 psi. 150 0.27 (k factor) -40 to 180 50 to 110

* Information shown as a guide only and should not be used as specification data.

Cast-on 7 mil. Clay Coated Paper							
Stock No.	Thickness x Width	Length	Color	Carton			
TPV7100208	.125" x .500"	75'	Black	48 Rolls			
TPV7100210	.125" x .625"	75'	Black	38 Rolls			
TPV7100212	.125" x .750"	75"	Black	32 Rolls			
TPV7100216	.125" x 1.00"	75'	Black	24 Rolls			
TPV7100306	.188" x .375"	50'	Black	64 Rolls			
TPV7100308	.188" x .500"	50'	Black	48 Rolls			
TPV7100310	.188" x .625"	50'	Black	38 Rolls			
TPV7100312	.188" x .750"	50'	Black	32 Rolls			
TPV7100316	.188" x 1.00"	50'	Black	24 Rolls			
TPV7100324	.188" x 1.50"	50'	Black	16 Rolls			
TPV7100332	.188" x 2.00"	50'	Black	12 Rolls			
TPV7100404	.250" x .250"	35'	Black	96 Rolls			
TPV7100408	.250" x .500"	35'	Black	48 Rolls			
TPV7100410	.250" x .625"	35'	Black	38 Rolls			
TPV7100412	.250" x .750"	35'	Black	32 Rolls			
TPV7100416	.250" x 1.00"	35'	Black	24 Rolls			
TPV7100420	.250" x 1.250"	35'	Black	18 Rolls			

Ask us about our "LD" Series, a great option for applications that do not require to be automotive certified. This cost effective closed cell PVC material is generally used to seal, cushion, insulate, and dampen vibration in a variety of applications. All PVC tapes come with a standard PSA unless otherwise specified or requested.





DIE CUTS

Die-cutting provides that next level of finished aesthetics while providing air-tight and water-tight seals to your application. LaVanture has 'in stock' die cuts and we have them to help you design a custom die cut seal. These parts are available with or without adhesive, individual pieces, or kiss-cut on a roll. Contact your Account Manager today!



TPV8100 Series Light Density Vinyl Foam Tape

Series TPV8100 and TMV8150 general purpose foam tapes are light density closed-cell Polyvinyl Chloride products. TPV8100 is cast-on 5 mil kraft 83# paper and TMV8150 is cast-on 1.5 mil polyester film to provide dimensional stability. Both are manufactured for use as a positive seals for irregular surfaces or for creating a tight seal on radius curve applications. This light density foam compresses easily, offers conformity, strength, and resilience. It creates a life long seal against air, moisture, light, and dust penetration.

Typical Industry Applications Include:

Automotive • Construction • Recreational Vehicle • Heating • Air Conditioning • Marine

Physical Properties *	
Density and Hardness:	8 lbs./cu.ft./25 (shore 00)
Compression Deflection:	2 psi @ 25%
Compression Set:	4 @ 25%
Tensile Strength:	30 psi.
Elongation Percent:	150
Thermal Conductivity:	0.27 (k factor)
Service Temperature:	-40 to 180
Application Temperature:	50 to 110

* Information shown as a guide only and should not be used as specification data.

Cast-on	5 mil	Kraft	83#	Paper	
---------	-------	-------	-----	-------	--

Cast-on 5 mil Kraft 65# Paper						
Stock No.	Thickness x Width	Length	Color	Carton		
TPV8100204	.125" x .250"	75'	Gray	96 Rolls		
TPV8100206	.125" x .375"	75'	Gray	64 Rolls		
TPV8100208	.125" x .500"	75'	Gray	48 Rolls		
TPV8100212	.125" x .750"	75'	Gray	32 Rolls		
TPV8100216	.125" x .1.00"	75'	Gray	24 Rolls		
TPV8100312	.188" x .750"	50'	Gray	32 Rolls		
TPV8100408	.250" x .500"	35'	Gray	48 Rolls		
TPV8100412	.250" x .750"	35'	Gray	32 Rolls		
TPV8100424-PW	.250" x 1.50"	35'	Polar White	16 Rolls		
TPV8100612	.375" x .750"	30'	Gray	32 Rolls		
TPV8100808	.500" x .500"	25'	Gray	48 Rolls		
TPV8100816	.500" x 1.00"	25'	Gray	24 Rolls		
TPV8100832	.500" x 2.00"	25'	Gray	12 Rolls		
Cast-on 1.5 mil Poly	vester Film					
TMV8150212	.125" x .750"	75'	Gray	32 Rolls		
TMV8150216	.125" x 1.00"	75'	Gray	24 Rolls		
TMV8150240	.125" x 2.50"	75'	Gray	8 Rolls		
TMV8150408V	.250" x .500"	35'	Gray	48 Rolls		
TMV8150412	.250" x .750"	35'	Gray	32 Rolls		
TMV8150416	.250" x 1.00"	35'	Gray	24 Rolls		
TMV8150616	.375" x 1.00"	30'	Gray	24 Rolls		
Custom Sizes Available						

AVAILABILITY:

All PVC foam tapes come standard with Pressure Sensitive Adhesive (PSA). Additional adhesive options are available upon request. Contact your account manager for more details.



Medium Density Vinyl Foam Tape

Series TPV1100 and TPV1500 foam tapes are medium density closed-cell Polyvinyl Chloride products. Both are cast-on 5 mil kraft 80# calendared paper for use as a "heavy duty" seal where strength and wear resistance are required. This medium density foam tape absorbs shocks, deadens sound, cushions, and limits excess vibration.

Typical Industry Applications Include:

- Automotive Construction Recreational Vehicle
- Heating Air Conditioning

Physical Properties*

Density and Hardness: Compression Deflection: Compression Set: Tensile Strength: Elongation Percent: Thermal Conductivity: Service Temperature: Application Temperature:

TPV1100 Series

11 lbs./cu.ft./28 (shore 00) 5 psi @ 25% 17 @ 25% 50 psi. 130 0.28 (k factor) -30 to -120 50 to -110 **TPV1500 Series** 15 lbs./cu.ft./40(shore 00) 7 psi @ 25% 8 @ 25% 80 psi. 160 0.30 (k factor) -30 to -200 50 to -110

* Information shown as a guide only and should not be used as specification data.

Cast-on 5 mil kraft 80# Paper

Stock No.	Thickness x Width	Length	Color	Carton	
TPV11100104	.063" x .250"	150'	Gray	96 Rolls	
TPV11100108	.063" x .500"	150'	Gray	48 Rolls	
TPV11100116	.063" x 1.00"	150'	Gray	24 Rolls	
TPV11100208	.125" x .500"	75'	Gray	48 Rolls	
TPV15100112	.063" x .750"	150'	Black	32 Rolls	
TPV1510SA	.125" x .250"	75'	Black	96 Rolls	
TPV15100206	.125" x .375"	75'	Black	64 Rolls	
TPV15100208	.125" x .500"	75'	Black	48 Rolls	
TPV15100212	.125" x .750"	75'	Black	32 Rolls	
TPV15100203	.125" x 3.00"	75'	Black	8 Rolls	
TPV15100312	.188" x .750"	50'	Black	32 Rolls	
TPV15100320	.188" x 1.25"	50'	Black	18 Rolls	
TPV15100372	.188" x 4.50"	50'	Black	12 Rolls	
TPV15100408	.250" x .500"	35'	Black	48 Rolls	
TPV15100412	.250" x .750"	35'	Black	32 Rolls	
TPV15100416	.250" x 1.00"	35'	Black	24 Rolls	
TPV15100432	.250" x 2.00"	35'	Black	12 Rolls	
TPV15100608	.375" x .500"	30'	Black	48 Rolls	
TPV15100648	.375" x 3.00"	30'	Black	8 Rolls	
Custom Sizes Available					



TPV1100/TPV1500 SERIES MEDIUM DENSITY VINYL FOAM TAPI

AVAILABILITY:

All PVC foam tapes come standard with Pressure Sensitive Adhesive (PSA). Additional adhesive options are available upon request. Contact your account manager for more details.

TPV1520 Series Double Face Vinyl Glazing Tape

TPV1520 Series is a medium density closed-cell Polyvinyl Chloride foam coated on both sides with an aggressive, pressure-sensitive adhesive, and an 84# polycoated two-side brown kraft liner.

TPV2500 Series Heavy Density Vinyl Foam Tape

TPV2500 Series is a heavy density closed-cell Polyvinyl Chloride foam. Designed for use in the most demanding foam sealing or cushioning applications. High internal strength resists pressure from outside forces and high hardness resists deterioration.

Typical Industry Applications Include:

- Automotive Construction Recreational Vehicle
- Heating Air Conditioning Marine

Physical Properties* Density and Hardness: Compression Deflection: Compression Set: Tensile Strength: Elongation Percent: Thermal Conductivity: Service Temperature: Application Temperature:

TPV1520 Series 15 lbs./cu.ft./40(shore 00) 7 psi @ 25% 8 @ 25% 80 psi. 60 0.30 (k factor) -30 to -200 50 to -110

TPV2500 Series

25 lbs./cu.ft./58(shore 00) 14 psi @ 25% 6 @ 25% 130 psi. 110 1 0.33 (k factor) -40 to -180 50 to -110

* Information shown as a guide only and should not be used as specification data.

Polycoated two side w/84# Brown Kraft Liner						
Stock No.	Thickness x Width	Length	Color	Carton		
TPV15200108	.063" x .500"	150'	Black	48 Rolls		
TPV15200112	.063" x .750"	150'	Black	32 Rolls		
TPV15200116	.063" x 1.00"	150'	Black	24 Rolls		
TPV15200424	.250" x 1.50"	35'	Black	16 Rolls		
Custom Sizes Available						

Cast-on 5 mil 83# Super Paper						
Stock No.	Thickness x Width	Length	Color	Carton		
TPV25100016	.031" x 1.00"	150'	Black	12 Rolls		
TPV2510024	.063" x 1.50"	100'	Black	8 Rolls		
Custom Sizes Available						



Foam Tapes and Bumpers

Foam Tapes and Bumpers offer protection for a variety of things including cabinet doors, cutting boards, appliances where quiet protection from nicks is desired.

Separator/Shipping Foam Pads provide glass protection during shipment. Ideal for transporting, packing, storage and installation of finished and unfinished glass doors, windows and mirrors.

Polyether Tape is a flexible fine cell foam tape designed for automotive gasketing applications, especially for RV doors. The high-tack permanent rubber-based pressure sensitive adhesive exhibits a superior balance of tack, peel and holding power on a wide variety of surfaces.

Polyethylene Foam Tape is single-coated cross-linked closed cell with rubber-based pressure sensitive adhesive with high tack and high sheer.

Neoprene Tape is a closed cell EPDM/SBR blend tape featuring a high tack rubber based adhesive with liner on one side.

PVC Foam Tapes are cost effective solutions for sealing out light, air, dust and moisture, and cushions against vibration and noise.

Polyester Urethane Foam is highly flexible, fine cell, fully clickable foam that is uniform and breathable without voids or tears.

Foam Tapes and Bumpers					
Stock No.	Thickness x Width x Length	Color	Carton Qty		
FP2575	.25" x .75 sq.	Black	17,900 pcs.		
TPEV25375	.25" x .375" x 50'	Black	48 rolls		
TPER 10075	1" X .75" x 25'	Gray	24 rolls		
TPER 12510	1.25" x 1" X 25'	Gray	18 rolls		
TPER 125250PW	.125"X.25"x 75'	White	71 rolls		
TPER 125975PW	.125" X 9.75"x 75'	White	6 rolls		
TPER 18750	.1875"x .75"x 100'	White	18 rolls		
TPER25500	.25" x .50"x 50'	White	36 rolls		
TPER37520	.375" x 2"x 50'	White	9 rolls		
TPER37550	.375" x .50"x 1,000'	Gray	8 rolls		
TPER426252PB	.0625"x 2"x 108'	Black	12 rolls		
TPER5350PB	.50" x 3" x 25'	Black	6 rolls		
TPER8212125	.125" x 1" x 225'	Gray	18 rolls		
TPER821250	.125" x 50" x 75'	Gray	36 rolls		
TPER845075	.50" x .75" x 25'	Gray	24 rolls		
TPER8511 ST	1" x 1" x 25'	Black	18 rolls		
TPER8550ST	.50" x .50" x 50'	Black	36 rolls		
TPER8575ST	.75" x .75" x 25'	Black	24 rolls		

A wide variety of additional products are also available. Please call for information.





See our Hardware catalog for cabinet bumpers.

LPC Foam tapes provide excellent bonding and barrier properties. Ideal for gasketing, sealing, cushioning, mounting and insulating in a wide range of industries, including HVAC, automotive, OEM assembly applications, and window manufacturing. FOAM TAPES AND BUMPERS

Butyl Sealants

These sealants are a butyl rubber, general -purpose product formulated from a blend of butyl rubber and polyisobutylene.



Butyl Tape

LaVanture Products distributes only high quality preformed butyl tape from the industries leading manufacturers. All tape is 100% crosslinked butyl that prevents galvanic corrosion, adheres to a variety of substrates and are In-Stock for Immediate Shipment at Factory **Direct Prices Custom** Sizes Available. Please contact us for information and pricing.

POLYshim II Tape

is a 100% solid, highly adhesive and elastic, cross linked butyl preformed tape with a continuous integral EPDM shim.

TremPro 651

TremPro 651 is specially designed for use in lower movement joints typically found in truck trailers and cabs, shipping containers, bus bodies, modular homes, and railroad cars. The product is a weather resistant exterior grade sealant that has excellent adhesion to wood, metal, glass, concrete, and masonry surfaces. TremPro 651 is a very economical and flexible general purpose sealant.

TemPro 651				
Stock No.	Description	Color	Size	Carton Qty
T651BSL	Exterior Grade Sealant	Black	20 oz Sausage	15 pcs
T651GSL	Exterior Grade Sealant	Gray	20 oz Sausage	15 pcs

Butyl Tape

TNG Series Butyl Tape is a 100% solid cross linked butyl, a preformed sealant used for lap sealing. It adheres tenaciously to a wide variety of substrates including steel, aluminum, and porcelain. It effectively seals dissimilar metals while preventing their contact that could cause galvanic corrosion. It is extruded on silicone coated paper for easy application. It is produced in many different sizes and lengths to fit all application requirements. Applications include truck trailers, cabs, bus bodies, recreational vehicles, and modular homes.

LBT Series Butyl Tape is a elastomeric butyl rubber sealant designed to meet the critical requirements of metal buildings. It also meets or exceeds all sealing requirements for window glazing, air conditioning, and refrigeration. It is extruded on silicone coated paper for easy application. It is produced in many different sizes and lengths to fit all application requirements.

Butyl Tape				
Stock No.	Thickness x Width	Length	Color	Carton Qty
TNG3212	.094" x .500"	50'	Gray	20 Rolls
LBT33234W	.094" x .750"	30'	White	24 Rolls
TNG3321	.094" x 1.00"	50'	Gray	20 Rolls
TNG332112	.094" x 1.50"	50'	Gray	8 Rolls
LBT332112W	.094" x 1.50"	40'	White	12 Rolls
TNG1812	.125" x .500"	40'	Gray	20 Rolls
TNG 1812BK	.125" x .500"	40'	Black	20 Rolls
TNG1834	.125" x .750"	50'	Gray	12 Rolls
LBT1834W	.125" x .750"	50'	White	10 Rolls
LBT181W	.125" x 1.00"	50'	White	8 Rolls
TNG 181	.125" x 1.00"	40'	Gray	12 Rolls
LBT18112W	.125" x 1.50"	30'	White	12 Rolls
TNG31612BLK	.188" x .500"	30'	Black	18 Rolls
TNG 1414BK	.250" x .188"	25'	Black	48 Rolls
TNG 14316	.250" x .188"	25'	Gray	48 Rolls
LBT1434W	.250" x .750"	20'	White	24 Rolls
Polyshim EPDM Tape				
Stock No.	Thickness x Width	Length	Color	Carton Qty
\$17DDV1760	.125" x .750"	40'	Black	12 Rolls
S17DEP1760	.125" x 1.50"	35'	Black	6 Rolls

LB 100 Butyl Rub Seal				
Stock No.	Description	Color	Size	Carton Qty
LB-100	Butyl Rubber Non-Skinning	Black	10oz Tube	30/Case
LBR900BSSG	Butyl Rubber Skinning	Black	20oz Tube	20/Case

Polyolefin Glazing Tapes

Our Polyolefin Series are high performance closed-cell, cross linked polyolefin foam tapes, coated on both sides with a lightly aggressive acrylic pressure sensitive adhesive, that aheres to well to a wide variety of surfaces. Great for sealing, cushioning,

thermal insulations, sound deading, and excessive vibration applications.

"TEI" Series is a low cost option that is used in popular applications like shower, mirror, exterior diecut gaskets, and other light duty mounting and general purpose applications.

DIE CUTS: Die-cutting provides that next level of finished aesthetics while providing air-tight and water-tight seals to your application. LaVanture has 'in stock' die cuts and we have the them to help you design a custom die cut seal. These parts are available with or without adhesive, individual pieces or kiss-cut on a roll. Contact your Account Manager today!

Polyolefin Glazing Tape Single Sided Adhesive					
Stock No.	Thickness x Width	Length	Color	Carton Qty	
TEI21012575	.125" X .750"	75'	White	32 Rolls	
TEI21012575B	.125" X .750"	75'	Black	32 Rolls	
TEI2102550A	.250" X .500"	50'	Black	12 Rolls	
TEI2102510A	.250" X 1.00"	50'	Black	24 Rolls	
TEI21025143	.250" X 1.438"	50'	Black	16 Rolls	
TEI2102516	.250" X 1.625"	50'	Black	16 Rolls	
TEI210252	.250" X 2.00"	50'	Black	12 Rolls	
Polyolefin Glazing Tape	Double Sided Adhesive	:			
TEI6260315	.031" X .500"	216'	Black	48 Rolls	
TEI4206350A	.063" X .500"	108'	White	48 Rolls	
TEI4206375A	.063" X .750"	108'	White	32 Rolls	
TEI4206310A	.063" X 1.00"	108'	White	24 Rolls	
TEI4201500	.063" X 1.50"	108'	White	16 Rolls	
TEI2201257	.125" X .750"	75'	White	32 Rolls	
TEI2201251	.125" X 1.00"	75'	White	24 Rolls	

Polyolefin Die Cuts Single Sided Adhesive				
Stock No.	Size	Color	Carton Qty	
TEI21025-1.56	.250" X 2.312" X 1.562"	Black	2160 pcs	
TEI21025-12X5	.250" X 12.375" X 5.75"	Black	100 pcs	
TEI21025-2.25	.250" X 2.25" OD	Black	4000 pcs	
TEI21025-7X3	.250" X 7.5" X 3.25"	Black	400 pcs	
TEI21025-2.438	.250" X 2.438" OD	Black	2000 pcs	
TEI20150-4X2*	.500" X 3.83" X 1.84"	Black	910 pcs	


*No Adhesive





High Bond Tapes

LaVanture Products offers the latest in Very High Bond and we represent the manufacturers, such as Gaska Tape Hi Bond Adhesive System (GHB), HB Fuller's High Bond Acrylic Tapes, or 3M VHB. All bring something unique to the table, whether it be an impregnated foam core or a solid acrylic tape, in an effort to increase production and ease of installation.



In most cases they will replace mechanical fastners, UV stable, wide range of temperatures, vibration resistant, and are corrosion resistant.

Contact your Account Manager to help navigate through our extensive options.

GHB Hi-Bond Tap	bes			
Stock No.	Thickness x Width	Length	Color	Carton Qty
THB40201185	.118" X .500"	54'	White	24 Rolls
THB402625375	.025" X .375"	216'	White	16 Rolls
THB402625750	.025" X .750"	216'	White	16 Rolls
THB402602510	.025" X 1.00"	216'	White	12 Rolls
THB40262520	.025" X 2.00"	216'	White	12 Rolls
THB40264575	.045" X .750"	108'	White	16 Rolls
THB40264510	.045" X 1.00"	108'	White	12 Rolls
THB40260850	.080" X .500"	54'	White	24 Rolls
THB4026080	.080" X .750"	54'	White	16 Rolls
THB40260801A	.080" X 1.00"	54'	White	24 Rolls
THB40260815A	.080" X 1.50"	54'	White	16 Rolls
THB452602575B	.025" X .750"	216'	Black	32 Rolls
THB45260455	.045" X .500"	108'	Black	24 Rolls
THB45260451B	.045" X 1.00"	108'	Black	12 Rolls
THB45260631	.063" X 1.00"	108'	Black	12 Rolls
THB46260901G	.090" X 1.00"	108'	Gray	12 Rolls
THB4720950	.090" X .500"	108'	Gray	24 Rolls
THB66260250	.020" X .500"	216'	Clear	24 Rolls

HB Fuller	Roval
nd ruller	κογαι

Stock No.	Thickness x Width	Length	Color	Carton Qty
LAT2045-500	.045" X .500"	108'	Gray	18 Rolls
LAT3045-500	.045" X .500"	108'	Transparent	18 Rolls
LAT3045-1	.045" X 1.00"	108'	Transparent	9 Rolls
3М				
Stock No.	Thickness x Width	Length	Color	Carton Qty
CHB461834	.025" X .750"	216'	White	12 Rolls
CHB462212	.045" X .500"	108'	White	18 Rolls
CHB46221	.045" X 1.00"	108'	White	9 Rolls
CHB4941F1	.045" X 1.00"	108'	Black	9 Rolls



Available in 1 gallon and 5 gallon cans



Automotive Special Applications Weather Seals

LaVanture EPDM rubber speciality seals are designed for special applications where exposure to weather, water, electricity, light, and human contact is involved.

EPDM is a highly stable polymer closed cell sponge material that will not absorb or hold moisture and is not effected by temperature extremes. EPDM also exhibits high electrical insulative properties, unlike most elastomers it exhibits superior UV resistance.

Specifications:

Most LaVanture EPDM rubber seals are medium density, 45-50 durometer. A small selection are dense, 65-70 durometer. These dense durometer seals are coded DD. Standard RMA tolerances apply to all the EPDM rubber seals.

Adhesives:

Adhesives are available for a wide variety of applications in either Heat Activated Tape System (HATS) or Pressure Sensitive Adhesive (PSA). Both options have been tested and have passed our ridgid performance requirements.

EPDM Specialty Seals						
Stock No.	Description	Width x Thickness	Color	Adhesive	Carton Qty	
LP2123-H	Triangle Seal, Hollow	.625" x .625"	Black	HATS	250'	
LP2730	L Seal DD	2.00" x 1.125"	Black	None	200'	
LP2028	Trim Gasket 85 DD	2.00" x 1.00"	Black	None	500'	
SP1596	Self Seal Weather Strip	.250" x .125"	Black	None	50'	
SP0445	Garage Door Seal	0.150" x 1.00"	Black	None	200'	
SP2003	Slide-Out Seal	2.24" x 2.079"	Black	None	100'	
TPDV810316	Gasket (cut pieces)	.188" x 6.875"	Gray	PSA	1000 pcs.	
Custom Sizes Avai	Custom Sizes Available					



SPECIALTY SEALS

www.lavanture.com | 800.348.7625 | sales@lavanture.com



Standard Trim

Standard trim is a flexible PVC Trim with metal clips inside to provide a permanent grip.


Product Specifications:

Recommended temperature range for general applications is -20 degrees F. through +150 degrees F. Outer coating material is Vinyl (PVC) with a hardness of 80 durometer which encases the internal steel clip, preventing corrosion. Flammability and code compliance for Vinyl are: FMVSS 302 and FAA/FAR 25.853.

Standard Trim				
Stock No.	Size	Color		Carton Qty
TS75B-32	3/32" x 7/16"	Black		250'
TS750B5-6	1/16" x 7/16"	Black		250'
TS100B-6	1/16" x 9/16"	Black		250'
TS100T-6	1/16" x 9/16"	Tan		250'
TS100W-6	1/16" x 9/16"	White		250'
TS100B-8	1/8" x 9/16"	Black		250'
TS100B-8A	1/8" x 9/16"	Black W/Adhesive		250'
TS100G-8	1/8" x 9/16"	Gray		250'
TS100W-8	1/8" x 9/16"	White		250'
TS100T-8	1/8" x 9/16"	Tan		250'
TS150B-8	1/8" x 9/16"	Black		250'
TS1375W-8	1/8" x 3/4"	White		250'
TS1375B-8	1/8" x 3/4"	Black		250'
TS100B-3	3/16" x 17/32"	Black		250'
TS100T-3	3/16" x 17/32"	Tan		250'
TS100W-3	3/16" x 17/32"	White		250'
TS150B-3	3/16" x 17/32"	Black		250'
TS1100B-3	3/16" x 9/16"	Black		250'
TS1375B-3	3/16" x 3/4"	Black		250'
TS1375W-3	3/16" x 3/4"	White		250'
TS100B-4	1/4" x 1/2"	Black		250'
TS1350B-4	1/4" x 11/16"	Black		250'
TS1350G-5	5/16" x 11/16"	Gray		250'
TS1375B-2	1/2" x 3/4"	Black		250'
Standard Trim with Bulb	Seal			
Stock No.	Size	Color	Bulb Location Sz	Carton Qty
TSB1300C-6	1/16"	Black	Loc C – 3/8"	250'
TSB1300A-6	1/16"	Black	Loc A – 3/8"	250'
TSB1400A-6	1/16"	Black	Loc A – 7/16"	250'
TSB1400AB-6	1/16"	Black	Loc AB – 7/16"	250'
TSB1600AB-6	1/16"	Black	Loc AB – 5/8"	250'
TSB1700A-6	1/16"	Black	Loc A – 3/4"	250'
TSB1300C-8	1/8"	Black	Loc C – 3/8"	250'
TSB1400AB-8	1/8"	Black	Loc AB – 7/16"	250'
TSB1400C-8	1/8"	Black	Loc C – 7/16"	250'
TSB1600C-8	1/8"	Black	Loc C – 5/8"	250'
TSB1600DE-8	1/8"	Black	Loc DE – 5/8"	250'
TSB1700A-8	1/8"	Black	Loc A – 3/4"	250'
TSB1400C-3	3/16"	Black	Loc C – 7/16"	250'
TSB1600AB-3	3/16"	Black	Loc AB – 5/8"	250'
TSB1700AB-4	1/4"	Black	Loc AB – 3/4"	250'
TSB1700C-3	3/16"	Black	Loc C- 3/4"	250'
Custom Sizes Available				

Rolls may contain usable splices.



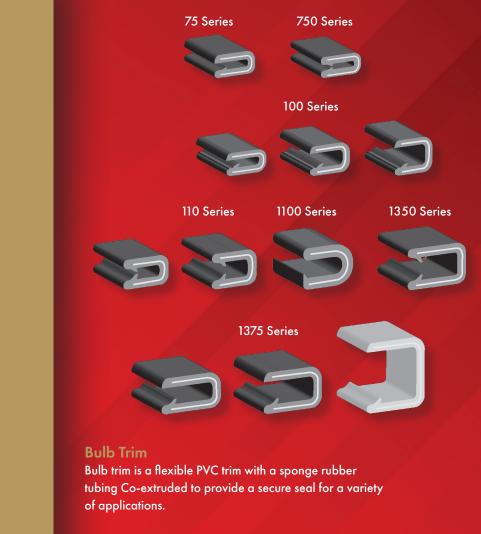

Applications Include:

- Auto Trunks Boat Hatches Car Hoods
- Golf Carts Tool Boxes Truck Caps
- RV Compartments Doors Utility Vehicles
- Vehicle Doors and Many Others

Product Specification:

Recommended temperature range for general applications is -20 degrees F. through +150 degrees F. Outer coating material is vinyl (PVC), hardness 80 durometer. Excellent Resistance to Water, Ozone, Sunlight, Low Temperatures and Compression Set. Flammability and code compliance for vinyl are FMVSS 302 and FAA/FAR 25.853.




LOCATIO LOCATIO D-E*


LOCATION

*Nonstandard location, special order

Typical Applications*

For optimum performance – 25% maximum compression recommended





www.lavanture.com | 800.348.7625 | sales@lavanture.com

Polyurethane Sealants

LaVanture Products stocks and distributes a full line of quality sealants and butyl tapes from one of the leading manufacturer in the industry, Tremco Products, inc.

Tremco sealants represent over 100 years of product innovations making it the single source leader offering superior sealing solutions to the O.E.M. market. LaVanture markets a broad line of Tremco products including polyurethane, silicone, latex, organic polymer and cross linked butyl sealants to meet your industry's unique applications. Tremco products are available in cartridges, sausages and drums.

Sealants and foam tape products are all available for immediate shipment from LaVanture Products warehouses. Speciality products are also available to meet unique applications.

TremPro 626/636

Product Descriptions: Vulkem 626/636 is a high performance, medium modulus, moisture-curing polyurethane sealant for use on pre-engineered metal buildings (PEMBs), HVAC units and other industrial fabrications. It was formulated to provide a pliable seal against many common industrial building materials. (Vulkem 636 is a smooth "non-textured" version of Vulkem 626)

Basic Uses: Vulkem 636 was designed to seal standing seam roof laps, wall joints, roof curbs, door and window perimeters, skylights, around fastener heads and various roof penetrations. In addition, Vulkem 636 offers exceptional adhesion to a variety of metal coatings, rigid PVC, fiber-reinforced polyester, anodized aluminum and galvanized and stainless steel.

TremPro 626/636			
Stock No.	Color	Size	Carton Qty
V626A	Aluminum	10.1 oz Cartridge	30pcs.
V626B	Black	10.1 oz Cartridge	30pcs.
V626G	Gray	10.1 oz Cartridge	30pcs.
V636GSL	Gray	20.0 oz Sausage	15pcs.



Fast-Cure, Low-VOC, High Solids Polyurethane Sealant. TremPro 635 utilizes a solvent-free technology, which represents technical advances over exsisting polyurethane systems. In addition, TremPro 635 demonstrates excellent adhesion to a wide variety of substrates, including ferrous, non-ferrous metals, Kynar finishes, composite materials and many plastic and rubber substrates. High performance, low to medium modulus, one component, gun grade polyurethane sealant. The sealant cures to a flexible rubber when exposed to atmospheric moisture.

Basic Uses

TremPro 635 is specially designed for use a topical sealant in the fabrication of trailers, trucks, campers, buses, trains, and speciality vehicles. It can be used in joints and seams in architectural panels and pre-engineered buildings.

Stock No.ColorSizeCarton QtyV635WWhite10.1 oz Cartridge30pcs.V635GGray10.1 oz Cartridge30pcs.V625BPlack10.1 oz Cartridge30pcs.	TremPro 6	35			E.
V635G Gray 10.1 oz Cartridge 30pcs.	Stock No.	Color	Size	Carton Qty	
	V635W	White	10.1 oz Cartridge	30pcs.	
V425P Pleak 101 or Cartridge 20per	V635G	Gray	10.1 oz Cartridge	30pcs.	
VOSSB Black 10.1 oz Cannage Supes.	V635B	Black	10.1 oz Cartridge	30pcs.	



LaVanture Products is the largest distributor of Tremco Products, supplying Cargo, Marine, and RV Industries.

POLYURETHANE SEALANTS



TremPro 638 SSL

Product Description: Vulkem 638 SSL is a high performance, low modulus, onecomponent, semi-self leveling polyurethane sealant. The sealant cures to a flexible rubber when exposed to atmospheric moisture.

Basic Uses: Vulkem 638 SSL is specially designed for sealing level or slightly sloped joints and seams in railcar, truck trailer, utility trailer, roof and floor assemblies. It can also be used in horizontal joints and seams in architectural panels and pre-engineered buildings. TremPro 638 SSL cures to withstand movement, shear, deflection, and moisture in lap and butt joint applications.

TremPro 638 SSL			
Stock No.	Color	Size	Carton Qty
V638G-29	Gray	29 oz Cartridge	12pcs.
V638GD	Gray	50 gallon Drum	1 Drum
V638GSL	Gray	20 oz. Sausage	15pcs.

TremPro Chem-X Pro (One-Part Hybrid Adhesive)

Product Descriptions: TremPro Chem-X Pro is a single component multi-purpose, nonsagging, high strength, hybrid polymer, adhesive sealant, designed to bond to a variety of substrates that are commonly found in manufactuturing. It is solvent and isocyanate free, exhibits excellent weather resistance, and has both adhesive and sealant capabilities.

Basic Uses: Typical applications include but are not limited to all window sunbstrates (glass, aluminum, pvc, & fiberglass), vehicles, RVs, cargo trailers, semi-trailers, truck bodies, steel tanks, HVAC units, boats, metal buildings, modular construction, cabinets, etc.

TremPro Chem-X Pro			
Stock No.	Color	Size	Carton Qty
ТХ833В	Black	10 oz Cartridge	12
TX833BSL	Black	20 oz Sausage	15
TX833W	White	10 oz Cartridge	12
TX833WSL	White	20 oz Sausage	15





CHEM-X PRO

TREMCO

TremPro 614

Product Description: TremPro 614 is a one-part, acetoxy silicone sealant that cures to a flexible rubber silicone when exposed to moisture present in the air.

Basic Uses: TremPro 614 is specially designed for sealing joints between most non-porous materials such as glass, aluminum, metal and metal alloys. Applications include railroad cars, recreational vehicles, truck trailers and cabs. Industrial and residential uses include HVAC, plumbing and kitchen/bath fixtures. TremPro 614 may also be used on site where a gun grade sealant is required. It is easily gunnable over a wide range of temperatures and has excellent adhesion to most common substrates without the use of a primer.

TremPro 614	Custom Colors NOT Available		
Stock No.	Color	Size	Carton Qty
T614A	Aluminum	10.1 oz Cartridge	30 pcs.
T614B	Black	10.1 oz Cartridge	30 pcs.
T614C	Clear	10.1 oz Cartridge	30 pcs.
T614CW	lvory	10.1 oz Cartridge	30 pcs.
T614W	White	10.1 oz Cartridge	30 pcs.

TremPro 645

Product Descriptions: TremPro 645 is a single component, medium modulus, neutral cure silicone sealant. TremPro 645 cures to a flexible rubber silicone when exposed to moisture present in the air.

Basic Uses: TremPro 645 is specially designed for sealing joints between most non-porous materials such as glass, aluminum, metal and metal alloys. Typical applications include: recreational vehicles, truck trailers and cabs. TremPro 645 is easily gunnable over a wide range of temperatures and has excellent adhesion to most common substrates without the use of a primer. The product also has superior handling and tooling characteristics when compared to other silicones. TremPro 645 has superior skin time, excellent ultraviolet resistance and movement capabilities. TremPro 645 is ideal for OEM and production line applications.

TremPro 645				
Stock No.	Color	Size	Carton Qty	
TH645A	Aluminum	10.1 oz Cartridge	30 pcs.	
TH645B	Black	10.1 oz Cartridge	30 pcs.	
TH645C	Translucent	10.1 oz Cartridge	30 pcs.	
TH645CW	Col White	10.1 oz Cartridge	30 pcs.	
TH645DT	Dark Tan	10.1 oz Cartridge	30 pcs.	
TH645G	Gray	10.1 oz Cartridge	30 pcs.	
TH645LO	Light Oak	10.1 oz Cartridge	30 pcs.	
TH645LT	Light Tan	10.1 oz Cartridge	30 pcs.	
TH645TB	Beige	10.1 oz Cartridge	30 pcs.	
TH645W	White	10.1 oz Cartridge	30 pcs.	
TH645IV	lvory	10.1 oz Cartridge	30 pcs.	
TH645ET	Earthtone	10.1 oz Cartridge	30 pcs.	
TH645CL	Clear	10.1 oz Cartridge	30 pcs.	
TH645MW	Martin Wood	10.1 oz Cartridge	30 pcs.	
Custom Colors Available				



REMPRO





Custom Color Matching

Color matching is also available of virtually any color whether an industry standard or a custom color. Contact us for more information

TremPro 655

Product Descriptions: TremPro 655 is a high performance, siliconized acrylic latex sealant formulated to provide a fast-setting pliable seal with minimal shrinkage.

Basic Uses: TremPro 655 is a general purpose sealant specially designed for OEM and production line applications requiring paint ability, fast skinning and low odor. Typical uses include: trailers, trucks, buses, modular homes, RV utility bodies, and shipping containers.

TemPro 655			
Stock No.	Color	Size	Carton Qty
T655A	Aluminum	10.1 oz Cartridge	30 pcs.
T655T	Tan	10.1 oz Cartridge	30 pcs.
T655W	White	10.1 oz Cartridge	30 pcs.

TremPro 659

Product Description: TremPro 659 is a one-part, high performance, elastomeric sealant for use in a variety of applications including roofing, gutter, siding, metal and vinyl trim, perimeter sealing, RV, modular home, bus bodies, truck trailers and cabs.

Basic Uses: TremPro 659 is a general purpose exterior sealant. TremPro 659 will cure to a smooth finish with a high gloss. TremPro 659 is designed for use in most standard construction butt, fillet and lap joints in which thermal movement and stress is expected.

TemPro 659			
Stock No.	Color	Size	Carton Qty
T659C	Clear	10.1 oz Cartridge	30 pcs.

Application Guns			
Stock No.	Description	Size	Carton Qty
C2N1007	White Cone Plastic Nozzle	STD	100
C41001	#7 Wexford Steel Cart Gun	10 oz	1
C41002	Jumbo Quart Cart Gun	29 oz	1
C51001	Avon 15" Manual Sausage Gun	20/10 oz	1
C5100CH-XT	Clear Sausage Avon Hook	10 oz	1
C61001	Tyne Cartridge Gun	10 oz	1
C61006-20	PHE Sausage Gun	20 oz	1



www.lavanture.com | 800.348.7625 | sales@lavanture.com

D • BASF

BASF products MasterBond[™], MasterSeal[™] and MasterCoat[™] provide strong bonds and fast tack-free times. These bonds and sealants have a relatively low surface-free energy (surface tension), allowing easy adhesion to high surface energy, clean metal surfaces. Unlike other adhesives and sealants, this adhesion is achieved through chemical bonding rather than physio-chemical attraction.

This chemical bond results in cohesive failure. With cohesive failure, the adhesive or sealant bond is so strong it will rip apart before coming away from the substrate. Extensive testing is done to maximize the cohesive capability of these products under many different circumstances.

MasterWeld 948

Gun grade polyurethane bonding adhesive that creates a permanent overnight bond. It will expand to bridge gaps up to 3/8". Good for most universal bonding applications

MasterSeal 631 (Formerly DegaCoat 310)

MasterSeal 631 is a non-fibered asphalt emulsion specifically formulated for use as a protective underbody coating. It provides preventitive corrosion barriers for transporty applications. MasterSeal 631 is fiber-free for application by brush or spray.

Masterweld[™]/MasterSeal Products

MasterWeld			
Stock No.	Color	Size	Carton Qty
DGB948-10	Lt. Brown	10.1 fl. oz.	12 pcs.
MasterSeal™			
DGC310-5	Cures to Matte Black	5 gal. pail	1 pail
DGC310D	Cures to Matte Black	53 gal. drum	2 drums



ADVANTAGE

LaVanture Products is proud distributor of BASF, the #1 construction chemicals company worldwide, offering comprehensive singlesource solutions such as high performance adhesive, sealant and coatings for transportation and industrial applications.



MasterSeal 22

MasterSeal 22 is polyurethane-based one component, moisture-curing adhesive/sealant. It maintains permanent flexibility with high bond strength providing outstanding durability.

MasterSeal 26

One component, general purpose sealant providing permanent adhesion and excellent tacking-time to speed production while providing superior protection.

MasterSeal 2000

A versatile one-component multi-purpose, elastomeric adhesive sealant that provides excellent performance on a wide variety of substrates and applications. Ultra fast tack for joints and seams.

MasterSeal™			
Stock No.	Color	Size	Carton Qty
DGS22G	Gray	10.1 fl. oz. Cartridge	24 pcs.
DG\$22W	White	10.1 fl. oz. Cartridge	24 pcs.
DGS26B	Black	10.1 fl. oz. Cartridge	24 pcs.
DGS26G	Gray	10.1 fl. oz. Cartridge	24 pcs.
DGS26W	White	10.1 fl. oz. Cartridge	24 pcs.
DGS26WSSG	White	20.0 fl. oz. Sausage	20 pcs.
DGS2000B	Black	10.1 fl. oz. Cartridge	24 pcs.
DGS2000S	Gray	10.1 fl. oz Cartridge.	24 pcs.
DGS2000W	White	10.1 fl. oz. Cartridge	24 pcs.
DGS2000C	Clear	10.1 fl. oz. Cartridge	24 pcs.



MASTER*

MasterWeld 626

>> MAST

PAGE 23

www.lavanture.com | 800.348.7625 | sales@lavanture.com



LaVanture Products has been providing quality sealant solutions for over 40 years and in an effort to expand our capabilities we have added these economical Series LS100 and LS150 to supplement our line of quality sealants. LS Series products are Made in the USA and are economically priced.

LS100

Product Description: LS100 is a one component, permanently flexible, RTV Mildew resistant silicone sealant. Manufactured for excellent adhesion to cultured marble, tile, glass, vinyl, aluminum, and sheet metal without the need of a primer and cures rapidly, when exposed to atmospheric moisture to form a durable tight bond. It is approved for cultured marble and window & door applications with excellent adhesion to glass, non-sag & slump, 50 year durability, quick curing, consistent gunablility & tooling.



Basic Uses: Cultured Marble Applications, Window & Door Applications, Glass Replacement, Kitchen & Bath, Industrial Applications.

LS100			
Stock No.	Color	Size	Carton Qty
LS100A	Aluminum	10.1 oz Cartridge	24
LS100B	Black	10.1 oz Cartridge	24
LS100C	Clear	10.1 oz Cartridge	24
LS100W	White	10.1 oz Cartridge	24
L\$100G	Gray	10.1 oz Cartridge	24
LS100KA	Khaki	10.1 oz Cartridge	24

LS150

Product Description: LS150 is a one component, non sag, permanently flexible neutral cure silicone sealant. Manufactured for excellent adhesion to vinyl, glass, aluminum, wood, sheet metal and most common building materials without the need of a primer and cures rapidly when exposed to atmospheric moisture to form a durable tight bond. It is AAMA and window & door approved with excellent adhesion to glass, non-sag & slump, 75 year durability, quick curing, excellent UV resistance, non-yellowing and consistent gunablility & tooling.

Basic Uses: Window & Door Applications, Glass Replacement, Industrial Applications, Copper Sheet Metal Applications interior walls, ceilings and floors to reduce Sound Transmission Class (STC) of partition walls.

LS150			
Stock No.	Color	Size	Carton Qty
L\$150W	White	10.1 oz Cartridge	24
LS150VP	Vine Pearl	10.1 oz Cartridge	24
LS150B	Black	10.1 oz Cartridge	24

Custom Color Matching

Color matching is also available of virtually any color whether an industry standard or a custom color. Contact us for more information







Eco-Friendly Sealants

These Energy Efficient Sealant or "Green' series sealants are beneficial to the effect on the environment at two levels. First, by minimizing the adverse effects pollutants have on the environment. Secondly, increasing a building's efficiency. Increasing a building's efficiency is made possible by reducing the amount of heat loss (or intrusion) by sealing cracks, seams, and other

The environmental effect reduction is made possible by our extremely low VOC (volatile organic compounds) levels. These "Green" products have VOC levels less than that required by the national standards.

Not only do the products listed here follow a "green" standard, they go beyond the obvious. For instance, the plastic cartridges that the sealants are filled in are made with postrecycled product, and we encourage our customers to follow a "recycling" program.

All Eco-Friendly " green" products are in stock and ready for immediate shipment.

LS25 Acrylic Latex Sealant

Product Description: LS25 is a premium grade multi-purpose siliconized acrylic latex sealant. Manufactured and Developed to provide excellent adhesion to vinyl, aluminum, wood, sheet metal and most common building materials without the need of a primer. It has been specially developed for the use in the installation of windows & doors and has minimal shrinkage. LS25 cures rapidly to form a durable tight bond.

Basic Use: Window & Door Applications, Cultured Marble, Tile and Industrial Applications



(600 mt. 180 OZ

LS25			\mathbf{i}
Stock No.	Color	Size	Carton Qty
LS25B	Black	10.1 oz Cartridge	24
LS25C	Clear	10.1 oz Cartridge	24
LS25W	White	10.1 oz Cartridge	24
LS25AD	Almond	10.1 oz Cartridge	24

LS500 Expanding Foam

Expanding 1-Part Energy Efficient Polyurethane Foam

LS500 Expanding Foam is a multi-purpose, UL-classified, one-component polyurethane foam designed specifically for window and door installation and retro-fit applications. Apply Expanding Foam onto any clean surface to fill and seal around windows and door frame joints, beneath base plates, mud sills, top plate penetrations, corner joints, T-joints, exterior cracks, around utility panels, pipes and duct penetrations. A critical advantage of this industrial/construction grade foam is its extremely low pressure build while curing, which greatly reduces the chances of bowing.

LS Expanding Foam is designed within international guidelines for protection of the ozone layer and other environmental guidelines.

Applications: Seal Exterior Openings, HVAC/R, Pluming, Roof, Insulation, Electrical, Transportation Seals, Marine Cabins, Appliance Trim & Parts

LS500 Description Carton Qty Stock No. Description Carton Qty LS500 Gray Expanding Polyurethane Foam 12 Cans LS500-GUN Expanding Polyurethane Foam Gun 1

LS200

LS200 Sealant/Adhesive is a paintable, fast curing adhesive/sealant formulated to exhibit superior adhesion and flexibility to a wide variety of substrates including: PVC, aluminum, stainless steel, galvanized steel, wood, FRP, marble, stone and laminate substrates. Eliminate squeaks with this solvent-free, non-isocyanate adhesive/sealant.

LS250

LS250 exhibits excellent adhesion to many substrates including aluminum, brass, steel, glass, mortar, granite, marble, wood and many plastics. Cures fast, even at low temperatures. Contains no solvents or isocyanates and is non-yellowing.

LS255

Semi-Self Leveling Roof Sealant

LS255 exhibits excellent adhesion to many substrates including: aluminum, brass, steel, glass, mortar, granite, marble, wood and many plastics. Cures fast, even at low temperatures. LS255 is highly weather resistant and can be painted with most paints. Contains no solvents or isocyanates and is nonyellowing. Authorized by the USDA.

LPC Sealants/Adhe	sives		
Stock No.	Color	Size	Carton Qty
LS200W	White	10.3 oz Cartridge	24
LSW200WS	White	20.0 oz Sausage	16
L\$250W	White	10.3 oz Cartridge	24
LS250G	Gray	10.3 oz Cartridge	24
LS250B	Black	10.3 oz Cartridge	24
L\$255G	Gray	10.3 oz Cartridge	24

LS Series Sealants are specially formulated for LaVanture products to meet the requirements of the Transportation, Recreational Vehicle and O.E.M industries. Custom formulas and colors are available. Please contact us for information and pricing.



THE STRONGEST FROM START TO FINISH

Liquid Nails			
Stock No.	Color	Size	Carton Qty
LNP902-28	White	28 oz	12
LN903HD-10	Tan	10 oz	24
LN990QG-10	White	10 oz	12
LNP602-5	Light Tan	5 Gal	1
LNX01MH-28	Light Tan	10 oz	24
LN715TS-10	White	10 oz	24
LN730M-10	White	10 oz	12

Contact Us About Freeze/Thaw Stability Questions.

LaVanture LS Series Specialty Sealants

LaVanture LS Series products are engineered to meet or exceed all the users specified sealant requirements. All LS series products are formulated to withstand the harshest continually tested to guarantee conformance with the high standards set by LaVanture for all of our sealant products. Applications include tractor trailers and buses. All of these specialty sealants are in stock for immediate shipment in single carton minimums.









ADCO/Eternabond is an integrated adhesives and sealants company with operations strategically located around the world. Their technologies are integral to many cutting-edge industrial trends, contributing to a more efficient, more productive and more sustainable future. LaVanture Products is proud to have been selected as an Adco/ Eternabond distributor.





Eternabond Roof Products

RoofSeal: Seal any rip, tear, or open seam in any surface with RoofSeal. RoofSeal is the best solution for leak repair. It is the choice of professional roof repair specialists, on virtually all roof types including EPDM, TPO, Hypalon, most PVC, modified, all metals, even copper and Kynar coated metals, tile, wood, concrete, etc. RoofSeal makes a permanent water-tight seal. Formulated as strong, fast drying, thermoplastic rubber adhesive sealants with controlled flow viscosity these products offer easy application and adhere to most surfaces including glass, fiberglass, steel, aluminum, rubber and most painted surfaces.

RV Seal: offers the same water-tight seal in a thinner profile of 21 mil thick.

Spray Primer: EternaPrime® is an adhesive and surface conditioner intended to aid adhesion of EternaBond® MicroSealant tapes, or other non- MicroSealant tapes such as butyl tapes and other self adhesive seaming tapes.. EternaPrime® also prepares most contaminated surfaces for tape application.

AlumniBond Tape: Designed for use on metal buildings, trailer/RV roofs and sides, drain pans, drain pipes, ductwork, boats and as protective coating for surfaces where abrasion and corrosion resistance is required.

DoubleStick Tape: A self-sealing adhesive creating a water-tight between two or more irregular or similar or dissimilar surfaces. Used as a lap seal, gasket, hole seal or gap seal.

ADCO/EternaBond Pro	ducts		
Stock No.	Size	Color	Carton Qty
LRSB-2-50	2" x 50'	Black	12 rolls
LRSB-3-50	3" x 50'	Black	8 rolls
LRSB-8-50	8" x 50'	Black	3 rolls
LRSB-24-50	24" x 50'	Black	1 roll
LRSG-2-50	2" x 50'	Gray	12 rolls
LRST-3-50	3" x 50'	Tan	8 rolls
LRSW-1.5-50	1.5" x 50'	White	16 rolls
LRSW-2-50	2" x 50'	White	12 rolls
LRSW-3-50	3" x 50'	White	8 rolls
LRSW-4-50	4" x 50'	White	6 rolls
LRSW-6-50	6" x 50'	White	4 rolls
LAB-2-50	2" x 50"	Aluminum	12 rolls
LAB-4-50	4" x 50"	Aluminum	6 rolls
LFS5766G	10 oz.	Gray	12 pcs.
LOPS-1	14 oz can	Clear	12 cans
LDS-1-50	1" x 50'	Black	24 rolls
LDS-2-50	2" x 50'	Black	12 rolls
LRVST-2.75-100	2.75"x 100'	Tan	8/cs
LRVSW-2.5-100	2.5"x 100'	White	8/cs
LRVSW-2.5-50	2.5"x 50'	White	8/cs
LRVSW-2.75-100	2.75"x 100'	White	8/cs
LRVSW-2-50	3"x 50'	White	12/cs
LLS7030B-5	5 gallon pail	Black	1 Pail
LMS7035B-5	5 gallon pail	Black	1 Pail
LM\$7036A-5	5 gallon pail	Aluminum	1 Pail
LLS7030B-5	5 gallon pail	Black	1 Pail
LMS7035B-5	5 gallon pail	Black	1 Pail
LMS7036A-5	5 gallon pail	Aluminum	1 Pail

LK140 is one-part gun grade polyurethane that replaces mechanical fasteners in most applications. This adhesive sealant has a permanent elasticity and is a fast moisture curing adhesive. Weather resistant temperature range of -80 F to 200 F.



Advanced Adhesive Technologies (AAT)

AAT272: Specially formulated water-based adhesive designed not only for the installation of felt backed sheet vinyl but also solid vinyl sheet goods [including "fiberglass" backed] intended for full-spread installations. AAT-272 can also be used to install linoleum, vinyl [12"x12"max.] or rubber tiles [24"x24"max.]. This unique adhesive will not stain or discolor resilient floors and eliminates the need to inventory several different adhesives for various types of sheet vinyls from a variety of manufacturers. This Super-Premium product provides adequate "slip time" and greatly reduces the "gassing" tendency common with most adhesives when installing nonporous floor coverings. While this adhesive is specifically intended for the installation of resilient floorings it can be used to install virtually any carpet regardless of the backing type.

AAT322: AAT-322 FG Sheet Vinyl PSA is an acrylic based adhesive specifically formulated for installing sheet vinyl with fiberglass cores and PVC cushioned backs intended for use with pressure sensitive adhesives (PSA). AAT-322 can be used on all grade levels over concrete and approved wood sub-floors in the absence of excessive moisture emissions and alkalinity. (MVER max. 5lbs./ 1000 sq ft/24 hours ASTM F 1869, RH 75% ASTM F 2170, pH 5-10) AAT-322 is nonflammable, contains no carcinogens, no solvents and is non-toxic. AAT-322 has excellent plasticizer migration resistance. AAT-322 is freeze-thaw stable. This zero VOC adhesive is protected by the CleanGuard® two-stage antimicrobial.

CleanGuard® is a specifically formulated broad-spectrum, anti-microbial agent that protects our adhesives and sealers from microorganisms, such as mold or mildew, in both the wet and dry state.

AAT MB188: Masterbond 188 is a 0 VOC, fast tack adhesive designed for the installation of glue-down carpets. This nonflammable adhesive is protected by the CleanGuard® two-stage antimicrobial. CleanGuard® is a specifically formulated broad-spectrum, anti-microbial agent that protects our adhesives and sealers from microorganisms, such as mold or mildew, in both the wet and dry state. Masterbond 188 is recommended for use with the following carpet backings: woven polypropylene (ActionBac®), polyurethane foam, jute, rubber, and needlepunch. Due to its non-staining formula, Masterbond 188 can be used to install felt backed sheet vinyl. NOTE: This adhesive is not recommended for pure vinyl backed sheet goods or carpets.

AAT Products			
Stock No.	Description	Size	Carton Qty
AAT272	Flooring Adhesive	4 Gallon	1 Pail
AAT322	Flooring Adhesive	4 Gallon'	1 Pail
AATMB188	Flooring Adhesive	4 Gallon	1 Pial













Sealant Tech	nical Specifications								
Product No.	Technology	Adhesive/Sealant	Strength	Paintable	Tack Free Time Hours	Full Cure Hours	Shelf Life Months	VOC Meets Threshold	Flexibility
LN990QG-10	Latex	Adhesive	8	Yes	1	24	12	No	200
LNP902	Latex	Adhesive	10	Yes	0.5	24	12	Yes	200
LA1000	Polyurethane	Adhesive	10	NA	0.5	24	15	No	0
LNP602	Solvent Elastromeric	Adhesive	8	Yes	0.25	24	12	Yes	800
LNX-01	Solvent Elastromeric	Adhesive	10	Yes	0.25	24	12	No	600
LES900	Elastomeric Sealant	Adhesive/Sealant	7	Yes	0.5	24	12	No	400
L\$255	MS (hybrid polyether)	Adhesive/Sealant	7	Yes	0.5	24	12	Yes	341
TX833	MS (hybrid urethane)	Adhesive/Sealant	10	Yes	0.25	72	12	Yes	412
RA12608(SolidSeal)	Polyurethane	Adhesive/Sealant	8	Yes	0.75	72	12	Yes	400
DGB948	Polyurethane	Adhesive/Sealant	9	Yes	1.5	2	12	Yes	NONE
LK 140	Polyurethane	Adhesive/Sealant	10	Yes	0.75	72	12	Yes	400
RA12176(Solid Bond)	Polyurethane	Adhesive/Sealant	10	Yes	0.75	72	12	Yes	500
LS200	SPUR (hybrid urethane)	Adhesive/Sealant	7	Yes	0.5	24	12	Yes	500
L\$250	SPUR (hybrid urethane)	Adhesive/Sealant	8	Yes	0.5	24	12	Yes	500
LAT2	Foam Core	High Bond Tape	10	NA	NA	NA	24	Yes	900
CVF	Foam Core	High Bond Tape	10	NA	NA	NA	12	Yes	0
ТНВ	Foam Core	High Bond Tape	10	NA	NA	NA	12	Yes	0
LAT3	Solid Acrylic	High Bond Tape	10	NA	NA	NA	24	Yes	500



Sealant Tech	nnical Specifications								
Product No.	Technology	Adhesive/Sealant	Strength	Paintable	Tack Free Time Hours	Full Cure Hours	Shelf Life Months	VOC Meets Threshold	Flexibility
T614	Acetoxy Silicone	Sealant	0	No	0.5	24	12	Yes	500
LS100	Acetoxy Silicone	Sealant	o	No	0.5	24	24	Yes	570
T655	Acrylic Latex	Sealant	0	Yes	0.25	24	12	Yes	200
L\$25	Acrylic Latex	Sealant	o	Yes	0.5	72	24	Yes	350
DGS310	Asphalt Eemulsion	Sealant	o	No	1	12	6	Yes	0
RA 12781 (Silaprene)	Block Copolymer	Sealant	0	Yes	0.5	24	12	No	500
LB-100	Butyl Coated Foam	Sealant	0	No	Non- Skinning	Non-Cure	24	Yes	0
T651	Butyl Rubber	Sealant	0	yes	24	72	12	No	0
LNTG	Elastomeric Acrylic Urethane	Sealant	0	yes	0.5	72	24	Yes	800
RA12724(Silaprene)	EPDM Polymer	Sealant	0	Yes	0.5	24	12	No	400
TH645	Neutral Silicone	Sealant	0	No	0.5	72	12	Yes	500
LS150	Neutral Silicone	Sealant	0	No	0.5	30	18	Yes	650
V626	Polyurethane	Sealant	0	Yes	48	72	12	Yes	200
V635	Polyurethane	Sealant	о	Yes	0.75	72	12	Yes	600
V638	Polyurethane	Sealant	0	Yes	0.75	2	12	Yes	600
DGS22	Polyurethane	Sealant	0	Yes	0.5	72	12	Yes	800
DG\$26	SPUR (hybrid urethane)	Sealant	о	Yes	0.5	72	9	Yes	238
Eternabond	Thermoplastic	Sealant	0	No	NA	NA	60	Yes	500
DG\$2000	Thermoplastic Elastomeric	Sealant	0	Yes	0.5	336	6	No	550
T659	Thermoplastic Elastomeric	Sealant	0	yes	0.5	72	12	No	800
ANTI-WICK	Water based	Sealant	0	yes	0.5	24	12	Yes	0

NONE	

GOOD

BETTER

BEST

EXCELLENT



LAVANTURE PRODUCTS INNOVATIVE PRODUCTS FOR CHALLENGING APPLICATIONS

Since 1969 LaVanture Products Company has been providing customers with high quality products to meet the challenging applications of today's markets. LaVanture stocks and distributes a full line of quality Sealants, Trims, Seals, and Foam Tape making it the single source leader for superior sealing solutions to the O.E.M. market. The sealant products are available in cartridges, sausages, and drums.

LaVanture Products is a major distributor of many hardware products from leading manufacturers all across the country and world. Most products are in stock and available for immediate shipment.

We also carry a wide range of products to seal your applications. LaVanture has a full line of "in stock" EPDM extrusions and a full line of caulks and sealants to handle any application. Our foam tapes are automotive grade and we stock over 200 sizes and styles at all times.

Our warehouse has over 10,000 different parts designed by us for the RV and Marine OEM markets. We use more than five extruders and injection molders to manufacture our parts. The parts are made to our specifications and we stand behind what we sell.

LaVanture has you covered from start to finish no matter what you're manufacturing. Give us a call today or visit our website to view our complete line of product catalogs.





MOLDED & EXTRUDED PLASTIC PRODUCTS

Our Molded and Extruded Products catalog features innovative, high quality products to meet the challenging applications of today's markets.





www.lavanture.com | 800.348.7625 | sales@lavanture.com

HARDWARE & ELECTRICAL PRODUCTS

Our Hardware & Electrical Products catalog features innovative, high quality products to meet the challenging applications of today's markets.



CHECK OUT OUR COMPLETE LINE OF PRODUCTS



Molded Extruded | Gas Springs | Trims & Seals | Hardware

3806 Gallatin Way Post Office Box 2088 Elkhart, IN 46515-2088

Phone: 574-264-0658 Fax: 574-264-6601 E-mail: sales@lavanture.com

www.lavanture.com

PROUD MEMBERS